

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

JC542 U.S. PTO  
09/416526  
10/12/99



Applicant(s): Erkko LEHTONEN, et al

Serial No.:

Filed: October 12, 1999

Title: AUTOMATIC CONFIGURATION OF SERVICES IN A  
COMMUNICATION SYSTEM

Group:

LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

October 12, 1999


Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the  
applicant(s) hereby claim(s) the right of priority based on  
United Kingdom Patent Application No. (s) 9822162.5 filed October  
12, 1998.

A certified copy of said United Kingdom Application is  
attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP

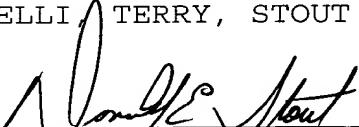  
Donald E. Stout  
Registration No. 26,422

DES/nac  
Attachment  
(703) 312-6600

**THIS PAGE BLANK (USPTO)**



The  
Patent  
Office

USA

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP9 1RH

10542 U.S. PRO  
09/416526  
10/12/99

## CERTIFIED COPY OF PRIORITY DOCUMENT


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

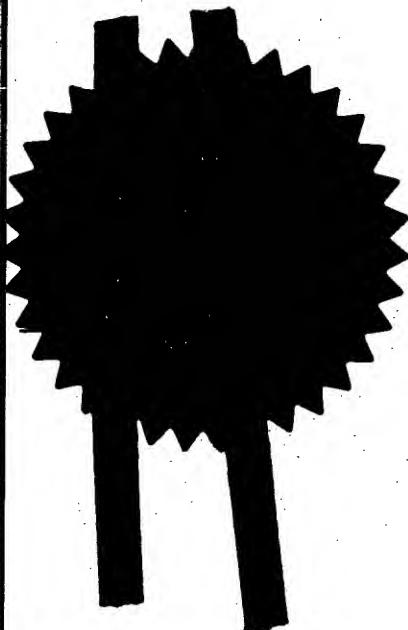

Signed

Dated

G D Govt.  
14 MAY 1999

**THIS PAGE BLANK (USPTO)**

Statement of inventorship and of  
right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

12 OCT 1998

1. Your reference

PAT 98416 GB

2. Patent application number  
(If you know it)

9822162.5

3. Full name of the or of each applicant

NOKIA MOBILE PHONES LIMITED

4. Title of the invention

AUTOMATIC CONFIGURATION OF SERVICES IN A  
COMMUNICATION SYSTEM5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent

By Virtue of an Assignment

6. How many, if any, additional Patents Forms  
7/77 are attached to this form?

(see note (c))

7.

I/We believe that the person(s) named over the page (and on  
any extra copies of this form) is/are the inventor(s) of the invention  
which the above patent application relates to.

Signature

Date 12/10/98


PAUL HIGGIN - Agent for the Applicant

8. Name and daytime telephone number of  
person to contact in the United Kingdom

EAN DAVIES - 01276 419043

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

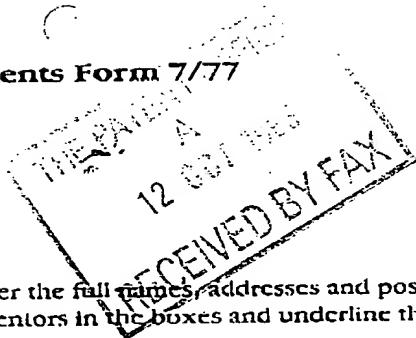

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

ERKKO LEHTONEN  
TEEKKARINKATU 5 A 23  
33720 TAMPERE

Patents ADP number (if you know it): 7531098001

JOUNI SMOLANDER  
PELLERVONKATU 22 A 13  
33540 TEMPERE

Patents ADP number (if you know it): 7531106001

**Reminder**

Have you signed the form?

Patents ADP number (if you know it):

THE PATENT OFFICE  
12 OCT 1996  
RECEIVED BY FAX

The  
Patent  
Office

12 OCT 98 E396573-1 002716  
P01/7700 0.00 - 5822162.5

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

12 OCT 1998

### 1. Your reference

PAT 98416 GB

### 2. Patent application number

(The Patent Office will fill in this part)

### 3. Full name, address and postcode of the or of each applicant (underline all surnames)

**9822162.5**

NOKIA MOBILE PHONES LIMITED  
KEILALAHIDENTIE 4  
02150 ESPOO  
FINLAND

Patents ADP number (if you know it)

5911995004

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

### 4. Title of the invention

AUTOMATIC CONFIGURATION OF SERVICES IN A  
COMMUNICATION SYSTEM

### 5. Name of your agent (if you have one)

"Addr:  
to wh:  
(includ  
Patent  
A3W 20/11/1998

Nokia UK Ltd  
Nokia IPR Department  
Nokia House, Summit Avenue  
Southwood  
FARNBOROUGH  
Hampshire, GU14 0NZ

PAUL HIGGIN  
NOKIA R&D (UK) LTD,  
Patent Department,  
Ashwood House,  
Pembroke Broadway,  
CAMBERLEY,  
Surrey, GU15 3XD

7/18540700

### 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country      Priority application number  
(if you know it)      Date of filing  
(day / month / year)

### 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application      Date of filing  
(day / month / year)

### 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d)

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description

14 / 8  
4 /  
1 /  
4 /  
4

Claim(s)

Abstract

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents —

Translations of priority documents —

Statement of inventorship and right to grant of a patent (Patents Form 7/77) *one*

Request for preliminary examination and search (Patents Form 9/77) ONE /

Request for substantive examination (Patents Form 10/77) —

Any other documents (please specify) —

11.

I/We request the grant of a patent on the basis of this application.

Signature *Paul Higgin*

Date 12 OCT 98

PAUL HIGGIN - Agent for the Applicant

12. Name and daytime telephone number of person to contact in the United Kingdom

EAN DAVIES - 01276 419043

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0615 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

PAT 98416 GB

## AUTOMATIC CONFIGURATION OF SERVICES IN A COMMUNICATION SYSTEM

5 This invention relates to a method for automatically configuring communication services for a communication system.

In this context, communications services comprise options provided by the service provider, such as Call Hold, Call Waiting, Call Forwarding, or Call Barring. In addition, services specifically related to text messages (SMS) and data calls may be provided.

10 The Global System for Mobile Communications (GSM) defines the use of Multiple Subscriber Profiles (MSP), whereby the subscriber may define up to 15 four different profiles. Each profile is defined as a set of communication services. The profile is chosen by the subscriber and/or the service provider.

15 The use of profiles further allows the subscriber to separate his telecommunication service needs into different categories e.g. personal and business. The relevant GSM Technical Specification is GSM 02.97 (Stage 1 20 Description of MSP service).

25 MSP is an optional service allowing subscribers to associate several profiles with a single Subscriber Identity Module (SIM), and a single International Mobile Subscriber Identity (IMSI), with each profile being a subscription option. Each profile may be used with Mobile Originated (MO) calls and Mobile Terminated (MT) calls.

30 Any charges accrued with a profile are billed under that profile, allowing the subscriber to customise how he is charged for use of the telephone service.

The subscriber may or may not be the user of the service. For instance, the subscriber may be an employer, and the user may be an employee of the subscriber to whom a phone has been issued for work use. The employer 5 may wish to provide a profile to the employee so that he may make personal calls using that profile, and be charged accordingly. It is possible, of course, that the subscriber and the user are the same person, as will be so for the majority of domestic subscribers. However, in the business arena of use, the user will generally not be the subscriber.

10

Individual profiles may be selected on a call-by-call basis, or one may be registered. The registered profile will be used for all speech calls, data calls and Short Message Service (SMS) transmissions unless another profile is explicitly selected prior to placing a call, or using the SMS service. 15 Throughout this specification, references to making or receiving a 'call' shall include making or receiving a speech or data call, and respectively sending or receiving an SMS message.

Up to four profiles may be provided, and hence selected, but only one of them 20 can be registered. Registration may be performed by the subscriber or the service provider. Note that in certain cases, the network operator, i.e. the owner and maintainer of the infrastructure, may be the same organisation as the service provider, i.e. the organisation which sells airtime contracts and provides a telecommunication service to the subscriber. Any reference herein 25 to service provider is intended to include network operator if appropriate.

Registration of profiles is managed by the Home Location Register (HLR) of the currently selected network. Selection of profiles can be managed at the 30 Visitors Location Register (VLR) only, as this is done on a per-call basis, and does not affect the registered profile held at the HLR.

All MO calls are handled according to the selected profile. The selected profile is the registered profile unless another is explicitly selected.

The GSM standard specifies that a profile may be selected by keying on the 5 keypad, \*59n# DN SEND, where *n* is the identity of the profile to be selected, and *DN* is the number to be called.

In order to register a profile, a similar process is followed. The code to be transmitted is \*59n# SEND i.e. no called number is included. This specifies to 10 the network that this instruction is a registration rather than a selection process.

The user may interrogate the network to determine which profile is currently registered. In GSM systems, this is accomplished by typing #59# SEND on 15 the MS. The network responds with the currently registered profile.

For MT calls, the profile is selected by association with the Mobile Station ISDN number (MSISDN) addressed. Each profile has a unique MSISDN. i.e. MSISDN #1 is associated with profile #1.

20 The profile registration process, according to the prior art, is illustrated at Fig.1 of the attached drawings. The process is assumed to begin with the MS in the IDLE state 100. It shows that when an attempt is made to register a profile 110 from the idle state, the network checks to ensure that the MSP 25 option is provisioned 120. If it is not, then an error is reported 140, 170 and the phone returns to the idle state 180 with the same profile as before. If MSP is provisioned, a further check is made to ensure that the chosen profile is provisioned 130. If it is not, then an error is reported 160, 170 and the phone returns to the idle state 180 with the same profile as before. If the chosen 30 profile is provisioned, then the new profile is registered with the Home

Location Register (HLR) 150, and the user is informed 170 before the phone returns to the idle state 180.

If MSP is not provisioned, then the profile used for a subscriber is termed the 5 default profile. This can only be configured by the service provider, and the subscriber has no control over its characteristics.

This profile registration process can only take place with explicit instructions from the service provider or the subscriber.

10 The GSM 02.97 Specification gives no implementation details as to how a profile is registered by the service provider. A disadvantage of the prior art system of registration is that one profile forms the registered profile for all circumstances, and will be used for all calls unless another profile is explicitly 15 chosen through selection or registration.

Consequently, the user of the MS must ensure that the correct profile is registered before he makes use of the services of the communications network. This reliance on manual intervention can lead to the incorrect profile 20 being used for a given situation, as well as being inconvenient for the user.

According to a first aspect of the present invention, there is provided a method of automatically configuring communication services for a subscriber within a communication system, comprising the steps of sensing an external 25 parameter; choosing for the particular subscriber, a configuration of communication services from a plurality of configurations; and using the chosen configuration in respect of the subscriber, wherein said choosing is performed in dependence on a pre-defined criterion and the sensed external parameter.

30

In GSM systems, each of the plurality of configurations may be a defined profile forming part of an MSP service.

Preferably, the subscriber may be able to define his own profile configuration  
5 and/or automatic registration criteria.

The external parameter may be any measurable variable outside the communication system. In preferred embodiments, external parameters which may be sensed include, but are not limited to environmental parameters such 10 as date, time or MS location. In another embodiment, external parameters, including hardware parameters such as equipment identity, may be sensed. In a further embodiment external parameters may include type of call (e.g. speech, data or SMS).

15 The pre-defined criterion may be defined in terms of one or more of the above parameters.

Preferably, in GSM systems, using the configuration for the subscriber corresponds to registering a profile with the HLR.

20 The invention could equally be used in other telecommunication standards employing multiple subscriber profiles, such as Universal Mobile Telecommunication Standard (UMTS). UMTS may implement a scheme whereby a single subscriber identity (USIM) is associated with a single 25 profile, and implementation of an MSP type service will require several USIMs per MS.

30 Preferably, the configurations are prioritised such that one of higher priority is always used before one of lower priority, provided that the criterion is met in each case.

One profile may be designated to be registered in the event that none of the profiles meet any of the criteria.

Certain configurations may be advantageously barred from use according to 5 rules set up either by the subscriber or the service provider.

As applied to GSM systems, such configurations are here termed forbidden 10 profiles. Advantageously, forbidden profiles allow the subscriber to exercise greater control over service usage, especially when the subscriber is e.g. an employer, and the user of the service is e.g. an employee.

The present invention offers an advantage in that the subscriber will generally 15 find himself operating with the appropriate profile for a given set of circumstances, and hence the need to manually register a new profile, with the associated inconvenience, and possibility of error is minimised.

According to a second aspect of the present invention, there is provided an 20 apparatus, for use in a communication system, comprising a register of subscribers to the communication system; a register of alternative configurations; sensing means for sensing an external parameter; means for choosing one of the alternative configurations in response to said sensing means and a predefined criterion; and means for using the chosen configuration in respect of a particular subscriber.

25 Preferably, the register of subscribers is contained in an HLR of a GSM system.

Preferably, the register of alternative configurations is associated with the 30 subscriber.

Preferably, the pre-defined criterion is associated with the subscriber.

For a better understanding of the present invention, and to understand how the same may be brought into effect, reference will now be made to the appended drawings in which :

5

Fig. 1 shows the prior art profile registration process according to GSM 02.97;

Fig. 2 shows the automatic profile registration process according to the present invention;

10

Fig. 3 shows how the manual registration process is modified to include checks for an attempt to register a forbidden profile;

15

Fig. 4a shows the communication paths in a communications network of the invention; and

Fig. 4b shows part of the internal structure of the HLR.

Embodiments of the present invention allow a different profile to be registered according to particular rules or criteria, defined in terms of parameters, including external parameters. A criterion may be time dependent. For example, a first profile may be registered between the hours of 9am and 5pm, Monday to Friday, and all calls made with that profile will be classed as business calls, and billed accordingly. Outside those time limits, a second profile may be registered, and all calls made with that profile will be classed as personal calls, and billed accordingly. A criterion may depend upon MS location. For example, a subscriber may regularly travel to another country, and he may wish to set up a profile which is automatically registered as soon as he connects to the foreign network. Also, if the MS makes a call from a designated cell-site, a more favourable tariff may be applied by the service provider. A further criterion which may be used to determine which profile

should be registered is the telephone number called from the MS. This would allow, for instance, all calls to one or more specified numbers to be made with a chosen profile which may have special billing arrangements.

5 The profile registration criteria are checked each time an MS connects to a network, and this forms part of the MS registration procedure along with the regular GSM activities of authentication and encryption. The registration criteria are re-evaluated by comparing the criteria against the parameter or parameters specified by the criteria, each time the MS makes a new call. The 10 parameters are compared at the HLR against the profile registration criteria to determine whether a new profile should be registered in response to a change in the specified parameters. For example, if the profile is required to change from 'business' to 'personal' at 5pm on weekdays, then at call set-up, the HLR will check the registration criteria against the time, and make any 15 necessary changes to the registered profile.

MSP is an optional service provided by the service provider, and when subscribing to this option, the subscriber can specify which services are to be associated with each profile. According to embodiments of the present 20 invention, the subscriber can also specify the criteria which are to be used for automatic profile registration. An example specification might be as shown in the tables below :

Profile #	Service Configuration
1	Speech, SMS, BIOC-exHC
2	Speech, SMS, 9.6Kbit/s non-transparent data
3	HSCSD, GPRS, Fax
4	BAOC

TABLE 1a

Automatic Registration Criteria	Profile #
Monday – Friday AND Home Network	1
Cell ID = AB1	1
Saturday and Sunday AND Home Network	2
Type of Call = DATA	3
Equipment = Nokia® Communicator AND Number Called = 0345 67890	3
Any day AND Non-Home Network	4

TABLE 1b

5 The above tables shows how the subscriber might wish to organise his services depending on which profile is in use at any given time.

Table 1a shows how various service configurations may be defined for each profile. Table 1b specifies the criteria which are used to automatically register the appropriate profile.

10 Profile #1 provides for speech services, SMS messaging and Barring Of outgoing International Calls except those to the Home Country (BOIC-exHC). This profile will be automatically registered according to the criteria specified in Table 1b. In this case, profile #1 will be used Monday to Friday on the 15 home network, or if the ID of the cell in which the mobile is situated corresponds to AB1.

20 Profile #2 provides for speech services, SMS messaging and data service specified at 9.6Kbit/s non-transparent. The criteria for which this profile will be automatically registered can be found in Table 1b i.e. Saturday and Sunday when connected to the home network.

Profile #3 provides for High Speed Circuit Switched Data (HSCSD), General Packet Radio Services (GPRS) and Fax services. This profile will be automatically registered if the type of call is Data, or if the International Mobile Equipment Identity (IMEI) corresponds to a Nokia® Communicator 5 and a certain number is called.

Profile #4 provides for Barring of All Outgoing Calls (BAOC), where only emergency (112 or 999) calls may be made, and incoming calls can be received. The criteria for which this profile will be automatically registered is 10 when the MS is roaming i.e. not on the home network.

Table 1b shows how more than one criterion may be defined to automatically register a given profile. If this is the case, the relevant profile will be registered if any one of the alternative criteria evaluates positive.

15 There is no limit to the logical combinations which can be defined, and all the normal logical operators (e.g. AND, OR, NOT) may be used to define the criteria.

20 It may be useful to provision certain services, e.g. Call Waiting, across all profiles to avoid user confusion when switching between profiles.

In an alternative embodiment, profiles and/or automatic registration criteria 25 may be defined by the service provider, with the subscriber being able to choose his particular configuration from those offered.

It is apparent that there may be overlap between the criteria, and to ensure 30 that no conflicts arise, it may be necessary to either prioritise the profiles i.e. profile #4 is always registered ahead of profile #3,2 or 1 even if the criteria are satisfied in more than one instance, or prioritise the individual criteria e.g. time of day always takes precedence over location or equipment identity.

It is also possible to envisage a situation where none of the registration criteria are met. If this happens, the previously registered profile will be used, or one profile may be designated to be registered anyway. This may not be 5 the same as the defined default profile which is used if MSP is not provisioned.

The automatic registration process in response to making a call is shown in flowchart form in Fig. 2. This shows the MS initially in the IDLE state 200. 10 When the MS initiates a call 210, the HLR checks that MSP is provisioned 220. If it is not, then the default profile, defined by the service provider, is used 225. If MSP is provisioned, then the HLR determines the appropriate profile 230 by evaluating the pre-defined rules or criteria. To evaluate the rules or criteria, the HLR refers to the register of alternative profiles for the 15 calling subscriber, and then senses or receives the individual parameters specified in the criteria. For instance the parameters upon which profile registration depend may include, but are not limited to external parameters such as time, date, equipment identity, MS location and type of call. The values of the parameters are compared to the requirements of the criteria, 20 and the profile having the highest priority of those that evaluate positive against the criteria is registered 240.

With the profile registered, the call proceeds in the normal way 250. After the call is terminated, the MS returns to the IDLE state 260.

25 It may be desirable to block certain profiles from being used according to certain criteria. Such profiles are here termed **forbidden profiles**. Two scenarios exist where profiles may be forbidden :

30 1. Registration may be forbidden.  
2. Selection may be forbidden on a call-by-call basis.

The use of the forbidden profile allows the subscriber to control access to different profiles. For example, the 'business' profile may be automatically registered during normal working hours, and all calls made with that profile

5 are paid for by the employer/subscriber, whereas all calls outside those hours are made with the 'personal' profile automatically registered, and are paid for by the employee/user. In this example, the business profile is forbidden outside the time limits set by the subscriber. Any attempt to manually register or select the 'business' profile outside the specified time limits will result in the

10 user being informed of an error, the registered profile will not alter and neither will the user be able to select the requested profile.

The subscriber can thus limit the user's access to profiles according to rules which he defines with the service provider.

15 The automatic registration process may not register a profile which is forbidden. The forbidden profile is primarily intended to prevent the user from manually selecting or registering a profile whose use is barred according to certain rules.

20 Additionally, the service provider may wish to block access to certain profiles, and he too is able to declare one or more profiles forbidden.

25 The flowchart of Fig. 3 shows how the registration process is altered by the addition of the forbidden profile option. The process begins with the MS in the IDLE state 100. An attempt is made to register a new profile 110. A check is then made to ensure that the MSP service is provisioned 120. If not, an error is reported 140, 170 and the phone returns to the idle state 180. If MSP is provisioned, a further check is made to ensure that the chosen profile is provisioned 130. If it is not, then an error is reported 160, 170, and the phone returns to the idle state 180. If the chosen profile is provisioned, then a check

is made to ensure that registration of that profile is not forbidden 300. If it is, an error is reported 310, 170 and the phone returns to the idle state 180. If registration of the profile is permitted, then the new profile is registered with the HLR 150, and the user is informed 170 before the phone returns to the 5 idle state 180.

In the above process, any step which leads to an error 140, 150, 160, will maintain the registration of the previously registered profile.

10 With only minor modifications, the flowchart of Fig. 3 applies equally to attempts to select, rather than register, a forbidden profile. Selection of profiles is managed by a VLR if the MS is away from the service area of the HLR. If this is the case, then step 150 would comprise setting the data in the VLR for the duration of that call only.

15 The HLR holds a register of the subscribers to the communication service. Each subscriber will have an individual record comprising, amongst other data, information relating to whether MSP has been provisioned, how the profiles have been defined, automatic registration criteria, and forbidden 20 profiles, if any.

Fig. 4a shows the configuration of a typical communications network according to an embodiment of the present invention. The HLR 450 forms part of the Mobile Services Switching Centre (MSC) 440. Communication 25 between the MSC 440 and the MS 410 is effected via a Base Station Controller (BSC) 430, and a Base Station (BS) 420.

The communication paths between the various elements of the network are indicated by arrows.

30

Fig. 4b shows part of the internal structure of the HLR of Fig. 4a. Depicted is the register 500 which stores subscriber data, including details of MSP provision, automatic registration criteria and forbidden profiles. The HLR needs the values of parameters 530 to evaluate the criteria stored in the 5 register 500. The HLR is able to sense any external parameters 530 needed. Sensing means 520 are provided to read the defined parameters 530. For instance, one of the external parameters may be date or time, and the HLR will be able to evaluate this via a real-time clock. Another external parameter may be equipment identity or MS location. Both of these variables are 10 transmitted to the network by the MS at least at subscriber registration to the network. Again the sensing means 520 is sensitive to this information. Processor 510 reads data 540 from the sensing means 520, and 560 from the register 500 regarding the automatic profile registration criteria, and chooses a profile according to the criteria defined in the register 500 and the 15 measured parameters 530. As a result of this process, the new profile is registered by writing 550 this information into the register 500.

In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

The present invention includes any novel feature or combination of features 20 disclosed herein either explicitly or any generalisation thereof irrespective of whether or not it relates to the claimed invention or mitigates any or all of the problems addressed.

**CLAIMS**

1. A method of automatically configuring communication services for a subscriber within a communication system, comprising the steps of:

5

sensing an external parameter;

choosing for the particular subscriber, a configuration of communication services from a plurality of configurations; and

10

using the chosen configuration in respect of the subscriber, wherein

15 said choosing is performed in dependence on a pre-defined criterion and the sensed external parameter.

15

2. A method as claimed in claim 1 wherein the plurality of configurations is dependent upon the subscriber.

20 3. A method as claimed in claim 1 or claim 2 wherein the pre-defined criterion is dependent upon the subscriber.

4. A method as claimed in any of the preceding claims wherein the choosing is performed each time a call is made.

25 5. A method as claimed in any of the preceding claims wherein the plurality of configurations are ranked in order of priority such that one of relatively higher priority which satisfies the criterion is used before one of relatively lower priority which also satisfies the criterion.

6. A method as claimed in any of the preceding claims wherein a configuration is designated to be used in the event that no other configurations meet the pre-defined criterion.
- 5 7. A method as claimed in any of the preceding claims wherein the automatic process may be manually overridden to use a configuration.
8. A method as claimed in claim 7 wherein use of a certain configuration is not permitted according to a predefined rule.
- 10 9. A method as claimed in any of the preceding claims wherein the plurality of configurations are stored in a central database of a communication system.
- 15 10. A method as claimed in claim 9 wherein the central database is a Home Location Register of a GSM system.
11. A method as claimed in any of the preceding claims wherein the predefined criterion is dependent upon the date.
- 20 12. A method as claimed in any of the preceding claims wherein the predefined criterion is dependent upon the time.
13. A method as claimed in any of the preceding claims wherein the predefined criterion is dependent upon the location of the mobile station.
- 25 14. A method as claimed in any of the preceding claims wherein the predefined criterion is dependent upon the equipment identity of the mobile station.

30

15. A method as claimed in any of the preceding claims wherein the predefined criterion is dependent upon the number called.

16. A method as claimed in any of the preceding claims wherein the predefined criterion is dependent upon the type of call made.

17. A method as claimed in any of the preceding claims wherein a configuration is chosen according to a plurality of predefined criteria.

10 18. A method for automatically registering a profile with a communication system substantially as herein described, with particular reference to Figure 2 of the accompanying drawings.

19. An apparatus, for use in a communication system, comprising :  
15 a register of subscribers to the communication system;

a register of alternative configurations;

20 sensing means for sensing an external parameter;  
means for choosing one of the alternative configurations in response to said sensing means and a predefined criterion ; and

25 means for using the chosen configuration in respect of a particular subscriber.

20. An apparatus as claimed in claim 19 wherein said registers form part of the Home Location Register (HLR) of a GSM communication system.

30 21. An apparatus as claimed in claim 19 or claim 20 wherein the register of alternative configurations is associated with the subscriber.

22. An apparatus as claimed in claim 19, 20 or 21 wherein pre-defined criterion is associated with the subscriber.

5 23. An apparatus for a communication system substantially as herein described, with particular reference to Figures 4a and 4b of the accompanying drawings.

10 24. An apparatus or method as claimed in any preceding claim wherein the external parameter is an environmental parameter.

25. An apparatus or method as claimed in any preceding claim wherein the external parameter is a hardware parameter.


15

**ABSTRACT**

A method and apparatus is disclosed which allows for automatic configuration of communications services within a communication system dependent upon 5 certain pre-defined criteria and external parameters.

Figure 2.

**THIS PAGE BLANK (USPTO)**

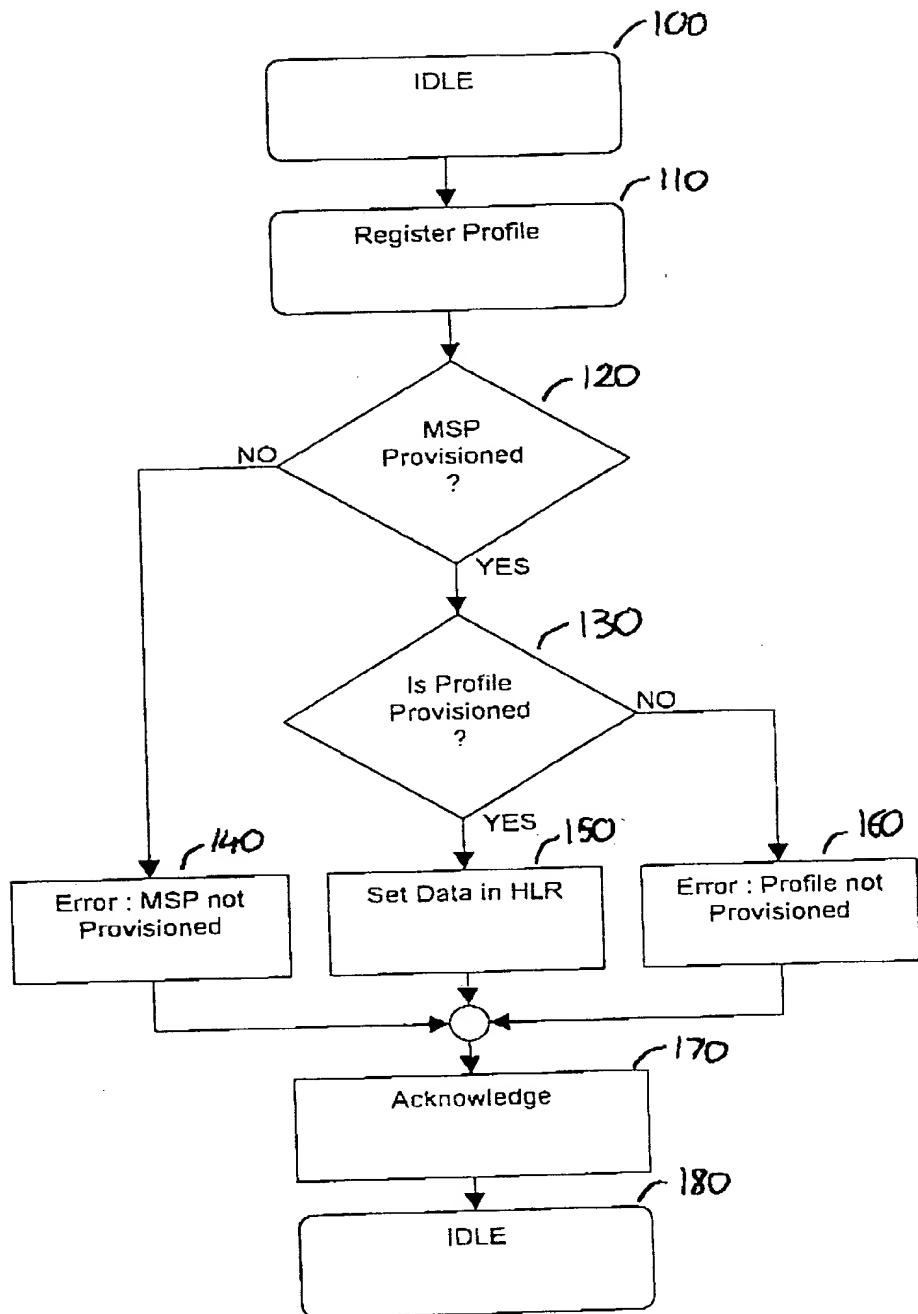

PRIOR ART

FIGURE 1

**THIS PAGE BLANK (USPTO)**

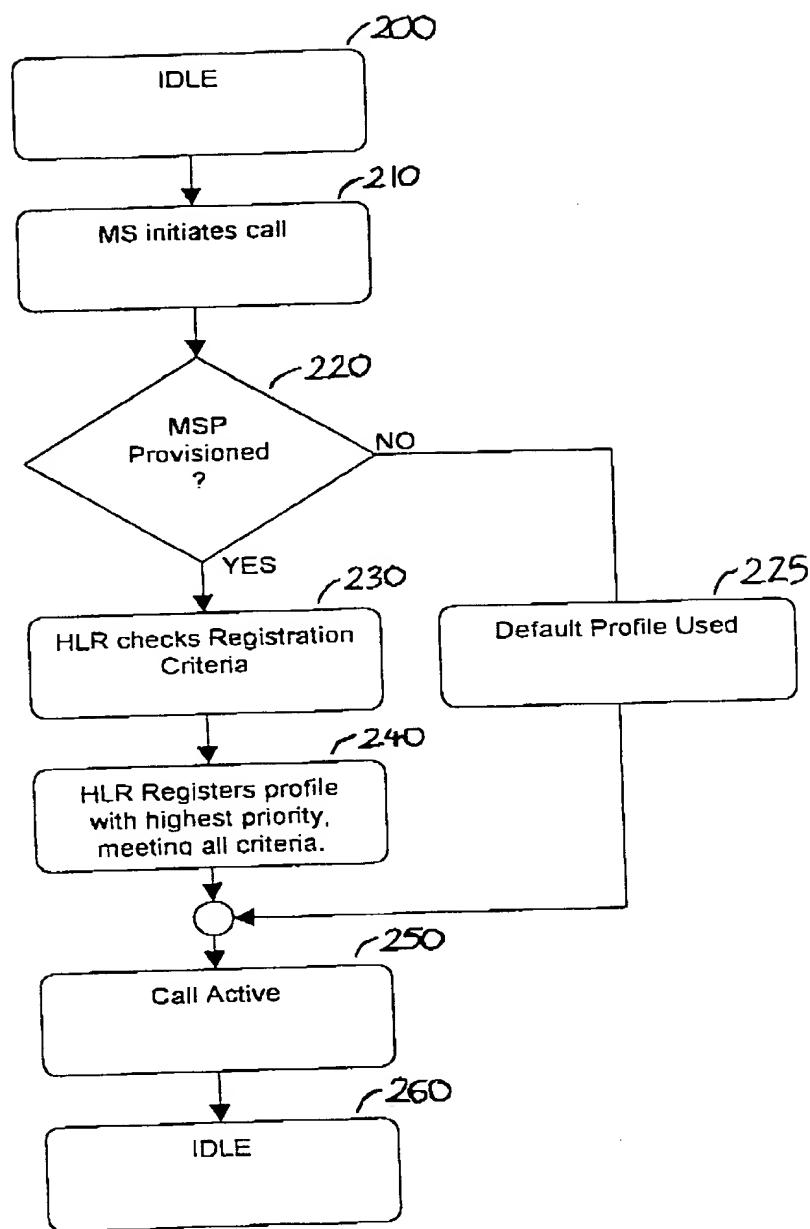


FIGURE 2

**THIS PAGE BLANK (USPTO)**

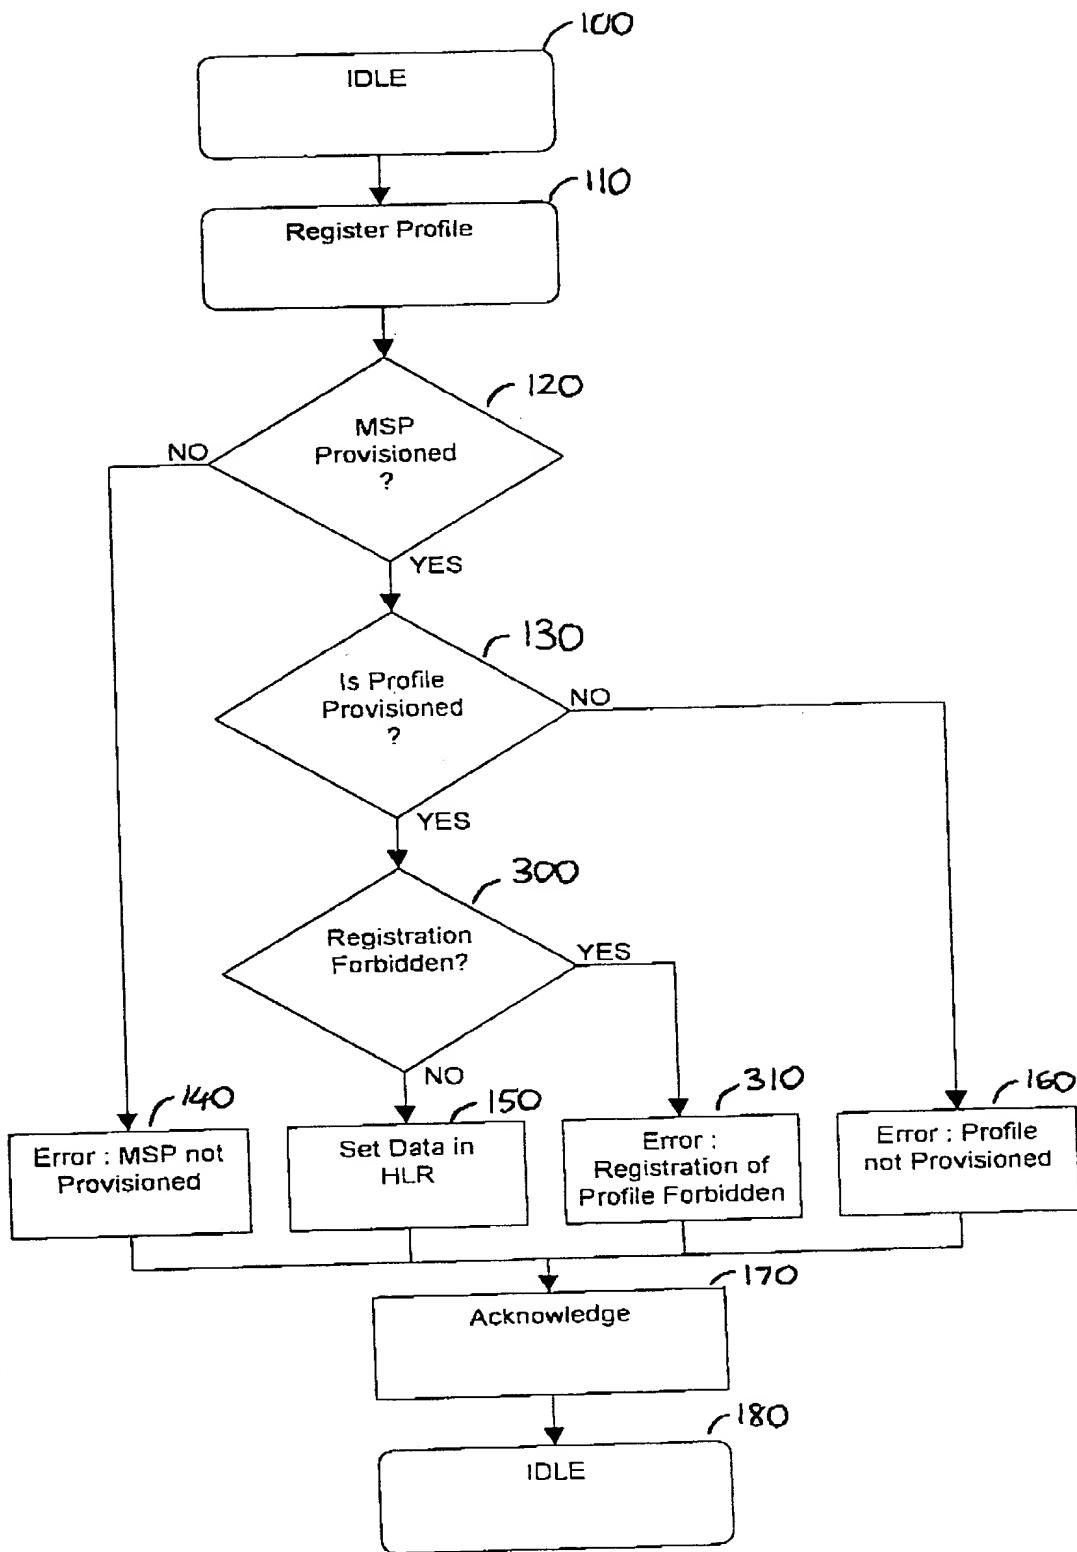


FIGURE 3

**THIS PAGE BLANK (USPTO)**

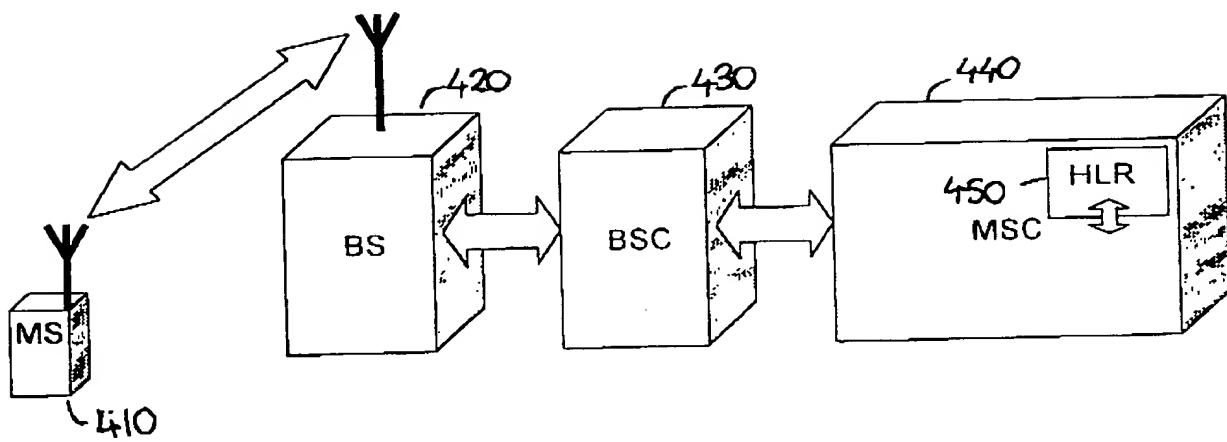


FIGURE 4a

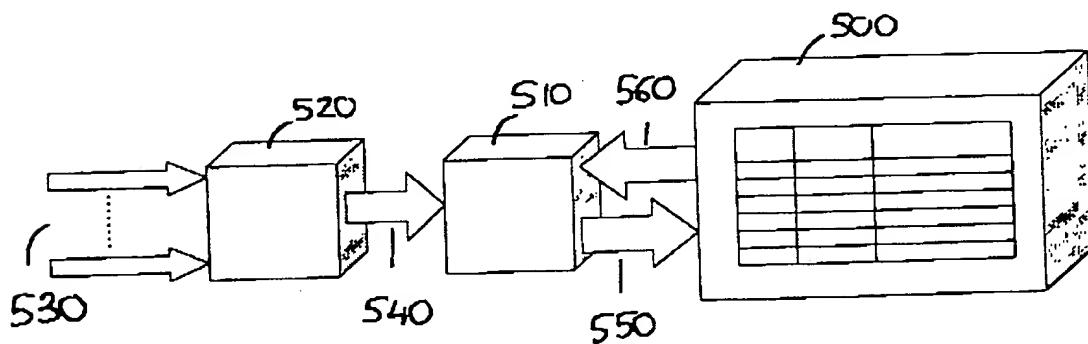


FIGURE 4b

**THIS PAGE BLANK (USPTO)**